
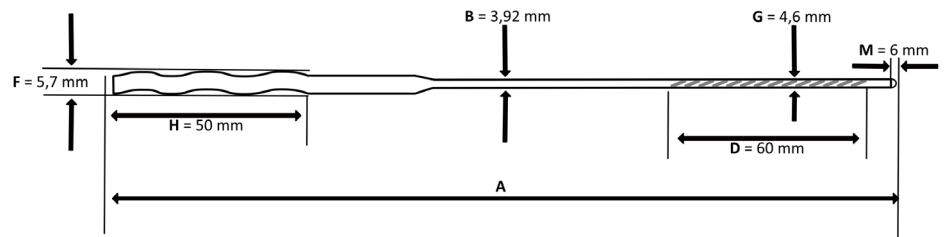


Inslaganker lijm/dunbed

The wall tie anchor with impact thread is a robust fastening anchor designed for reliable anchoring in solid brick and concrete substrates.

The standout feature of this anchor is its flattened wave end, which allows for easy placement within a thinner mortar bed in the outer leaf of the cavity wall. This innovative design enables the anchor to be securely positioned in the outer shell, ensuring a seamless integration with a thinner-than-average mortar joint.

1.4362 stainless steel



A: Length (+2 mm / -2 mm) | B: Thickness 3,92 mm (+0,03 mm / -0,03 mm) | D: Thread length 60 mm (+0 mm / -0 mm)
 F: Height of wave 5,7 mm (+0,3 mm / -0,3 mm) | G: Thread outer diameter 4,6 mm (+0,1 mm / -0,1 mm)
 H: Wave length 50 mm (+1,5 mm / -1,5 mm) | M: Crest length 6 mm (+1 mm / -1 mm)

Art. No.	Product description	Dimension	VPE
1260571	Inslaganker lijm/dunbed A2 - 200 mm	4 x 200 mm	250
1260572	Inslaganker lijm/dunbed A2 - 220 mm	4 x 220 mm	250
1260573	Inslaganker lijm/dunbed A2 - 240 mm	4 x 240 mm	250
1260574	Inslaganker lijm/dunbed A2 - 250 mm	4 x 250 mm	250
1260575	Inslaganker lijm/dunbed A2 - 260 mm	4 x 260 mm	250
1260576	Inslaganker lijm/dunbed A2 - 280 mm	4 x 280 mm	250
1260577	Inslaganker lijm/dunbed A2 - 300 mm	4 x 300 mm	250
1260578	Inslaganker lijm/dunbed A2 - 320 mm	4 x 320 mm	250
1260579	Inslaganker lijm/dunbed A2 - 340 mm	4 x 340 mm	250
1260580	Inslaganker lijm/dunbed A2 - 360 mm	4 x 360 mm	250
1260581	Inslaganker lijm/dunbed A2 - 380 mm	4 x 380 mm	250
1260582	Inslaganker lijm/dunbed A2 - 400 mm	4 x 400 mm	200

