
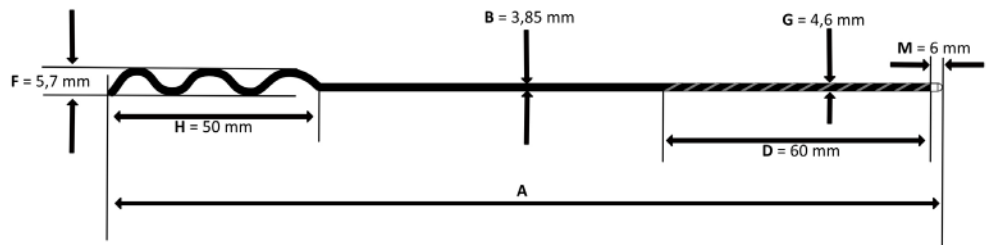


Inslaganker verzinkt

The wall tie anchor with Impact thread is a robust fastening anchor designed for reliable anchoring in solid brick and concrete substrates. Its unique wave profile and impact thread provide strong holding power, making it ideal for quick and stable installations.

galvanized material



A: Length (+2 mm / -2 mm)*1 | B: Thickness 3,85 mm (+0,1 mm / -0,1 mm) | D: Thread length 60 mm (+0 mm / -0 mm)
 F: Height of wave 5,7 mm (+0,3 mm / -0,3 mm) | G: Thread outer diameter 4,6 mm (+0,1 mm / -0,1 mm)
 H: Wave length 50 mm (+1,5 mm / -1,5 mm) | M: Crest length 6 mm (+1 mm / -1 mm)

Art. No.	Product description	Dimension	VPE
1260540	Inslaganker verzinkt - 180 mm	4 x 180 mm	250
1260541	Inslaganker verzinkt - 190 mm	4 x 190 mm	250
1260542	Inslaganker verzinkt - 200 mm	4 x 200 mm	250
1260543	Inslaganker verzinkt - 210 mm	4 x 210 mm	250
1260544	Inslaganker verzinkt - 220 mm	4 x 220 mm	250
1260545	Inslaganker verzinkt - 240 mm	4 x 240 mm	250
1260546	Inslaganker verzinkt - 250 mm	4 x 250 mm	250
1260547	Inslaganker verzinkt - 260 mm	4 x 260 mm	250
1260548	Inslaganker verzinkt - 280 mm	4 x 280 mm	250
1260549	Inslaganker verzinkt - 300 mm	4 x 300 mm	250
1260550	Inslaganker verzinkt - 320 mm	4 x 320 mm	250
1260551	Inslaganker verzinkt - 340 mm	4 x 340 mm	250
1260552	Inslaganker verzinkt - 350 mm	4 x 350 mm	250
1260553	Inslaganker verzinkt - 360 mm	4 x 360 mm	250
1260554	Inslaganker verzinkt - 380 mm	4 x 380 mm	250
1260555	Inslaganker verzinkt - 400 mm	4 x 400 mm	200
1260556	Inslaganker verzinkt - 420 mm	4 x 420 mm	200
1260557	Inslaganker verzinkt - 450 mm	4 x 450 mm	200
1260558	Inslaganker verzinkt - 500 mm	4 x 500 mm	200

